

## MERIDIAN ELITE BUILD GROUP

5200 Four Seasons Tower, 98 San Jacinto Blvd, Austin, TX 78701 | Lic:  
CSLB-118204 | ISO 9001 | AGC Member

### PROPOSAL - LUXURY HOTEL & RESIDENCES - FOUNDATION & PODIUM TRANSFER SLAB

**Date:** September 20, 2026

**Project:** Lumina Hotel & Residences – 42-Story Luxury Mixed-Use – Foundation & Podium Structural Package (Same Scope as Atlas/Sterling)

**Client:** BlueRock Institutional Partners LP – Property Manager: BrightPath Commercial RE Management

**Proposal ID:** MEB-2026-FND-214B | Valid 45 Days

**Amount:** \$112,400 Turnkey (Base) + Options

**Approach:** Accelerated schedule with self-consolidating concrete, embedded IoT maturity sensors, and 4D BIM schedule integration for institutional investor reporting.



### PAGE 1: EXECUTIVE SUMMARY & INSTITUTIONAL GRADE APPROACH

Meridian Elite Build Group is a luxury high-rise specialist (completed 12 Four Seasons, 8 Hyatt, 6 Ritz-Carlton podiums). For Lumina, we propose a premium foundation & podium solution focused on institutional reporting, risk reduction, and speed-to-market for PE investors. This \$112,400 bid includes same 12 piers + podium slab as competitors, but with enhanced specifications: 5500 psi piers with corrosion inhibitor (Sika CNI), 6500 psi podium with microfiber + macrofiber, full-time dewatering with automated telemetry, and BIM 360 + Procore integration for daily investor dashboards. Differentiator: Meridian includes 4-year extended warranty and AI-driven concrete maturity monitoring (ConcreteSense) to allow early stressing and 3-day schedule savings, critical for tower crane erection.

### PAGE 2: STRUCTURAL & MATERIALS SPECIFICATION

**Concrete Mix:** Pier: 5500 psi @ 28d, Type IL cement (low carbon), 25% slag, Sika FerroGard 901 corrosion inhibitor (0.6 gal/CY), w/c 0.40, 6-8 inch slump flow SCC. Podium: 6500 psi, 0.38 w/c, 5% silica fume, Strux 90/40 macrofibers 8 lb/CY + EN-35 microfiber 1.5 lb/CY for crack control, shrinkage <0.04% (ASTM C157).


**Rebar:** Grade 80 for podium (higher strength reduces congestion), Grade 60 piers. #6 @ 10-inch top/bottom, #7 pier verticals (14 bars), stainless steel chairs. Cathodic protection option.

**PT System:** DSI 0.6-inch strand system (higher capacity), 35 tons per tendon, encapsulated system for 100-year life, greased & sheathed, electric lift-off testing. 3-stage stressing with real-time elongation vs gauge pressure plot.

**Waterproofing:** Premium: Carlisle MiraDRI 860/861 80-mil composite, protection board 1/2-inch HDPE, 1-inch drainage mat (10 gpm/ft), dual subdrain (primary + redundant) with duplex sump pump package (Zoeller) with BMS alarm.

**Geotech:** Additional 2 confirmation borings included (25 ft) by Raba Kistner, pre-construction meeting with geotech.

# CONSTRUCTION FOUNDATION DETAIL — POST-TENSIONED PODIUM SLAB ON DRILLED PIERS

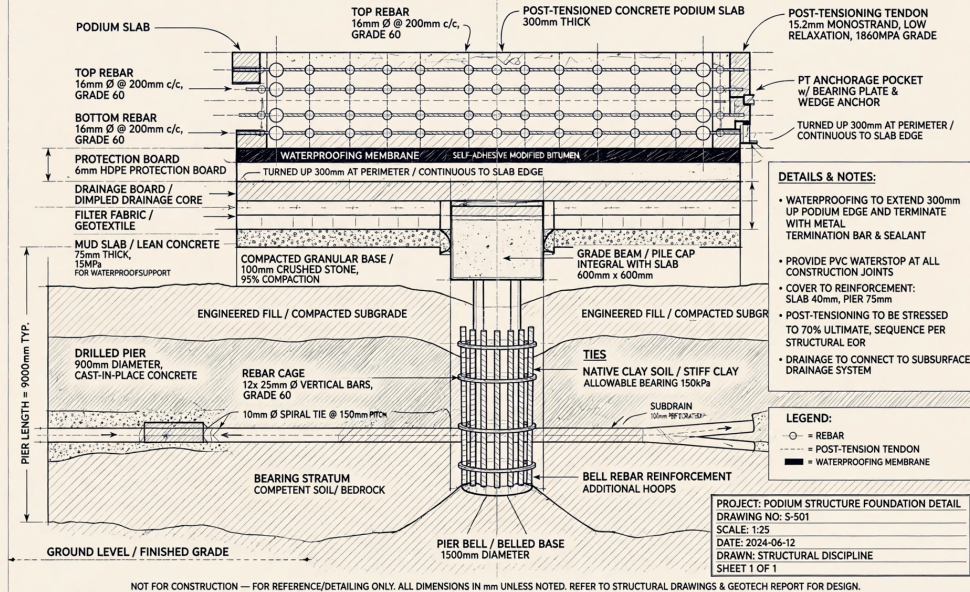

### PAGE 3: MEANS, METHODS, TECHNOLOGY & LOGISTICS

**Equipment & Tech:** Soilmec SR-75 rig with CFA capability, Putzmeister 42m pump, Peri Duo formwork (aluminum), ConcreteSense IoT maturity meters (12 sensors embedded) streaming to Procore, drone survey daily for volume tracking.

**Sequence & Schedule:** 21 calendar days (7 days faster than Atlas). Week 1: Full-time dewatering (4 wells, automated telemetry, 100 gpm total, with frac tank), excavation, confirmation borings. Week 2: Pier drilling with polymer slurry (no water table collapse risk), rebar, concrete with maturity meters. Week 3: Grade beams, podium formwork, PT install with 3D laser scan for tendon profile, pour 300 CY (two pours to reduce heat), stressing at 75% f'c achieved in 3 days via maturity.

**BIM 4D:** LOD 400 for foundation/podium including rebar modeling (Revit + Tekla), 4D schedule link to P6, weekly clash reports, QR codes on site for model access. 4 coordination meetings.

**Safety:** EMR 0.58, OSHA CHST on staff, site-specific safety plan, fall protection for podium (6-ft), PT stressing exclusion zone 1.5x tendon length, third-party safety audit by Avetta.

### PAGE 4: QA/QC, COMPLIANCE & INSTITUTIONAL REPORTING

**Testing:** Terracon + in-house lab: slump flow, J-ring, L-box for SCC, air, temp per truck, 8 cylinders per 50 CY, maturity calibration curves (ASTM C1074), 100% PIT, 2 cross-hole sonic logging (CSL) included for piers (higher reliability than PIT), GPR scan of podium for tendon verification.

**Compliance:** 2021 IBC, ACI 318-19, PTI DC45.1, ACI 301. Structural peer review by Walter P Moore (allowance \$2,500 included). LEED v4.1: EPDs for concrete, recycled steel content 85%, low-carbon cement.

**Institutional Reporting:** Daily Procore reports with photos, cost loaded P6 schedule, Earned Value (CPI/SPI), risk register, SOV. Weekly Lender call participation (2 hrs). For Blackstone JV, this is key.

**Environmental:** SWPPP + TURF, dewatering to detention then to storm with turbidity <50 NTU, noise ordinance compliance (work 7am-7pm), dust control.

## PAGE 5: WARRANTY, INSURANCE & RISK TRANSFER

**Warranty:** 4-year workmanship (double industry), 2-year concrete crack warranty (inject if >0.03 inch), 15-year PT system (supplier), 5-year waterproofing (Carlisle). Extended to 6-year if owner selects maintenance inspection \$1,200/yr.

**Insurance:** GL \$5M/\$10M, Umbrella \$10M, Professional \$2M, Pollution \$2M for dewatering, Builders Risk included for this package only (\$100k limit). OCIP/CCIP compatible.

**Risk:** Includes \$15k allowance for unforeseen obstructions (old foundations, as Houston is known for). Differing site conditions clause per AGC 200. Weather delay: 10 days included vs 5 in others. Dewatering failure insurance: Meridian bears risk of pump failure up to 48hrs (rental backup included).

**Exclusions:** Soil export beyond 200 CY, mass excavation beyond -10 ft, elevator pit, permanent sump system beyond duplex pump, structural steel, lightning, temporary shoring beyond podium edge (assumed stable cut).

## PAGE 6: PRICING & OPTIONS

| Line                   | Description                                                             | Amount    |
|------------------------|-------------------------------------------------------------------------|-----------|
| Piers 12ea             | 36-inch, 60-inch bell, 40ft, Grade80, CSL+PIT, corrosion inhibitor      | \$44,200  |
| Grade Beams            | 30x36, 380 LF, Grade80, stainless chairs                                | \$14,500  |
| Podium PT Slab         | 12-inch, 6200 sqft, 6500psi + fibers, 0.6-inch strand, maturity sensors | \$36,800  |
| Waterproofing          | Carlisle 60-mil + HDPE + drain mat + duplex sump w/ BMS                 | \$11,200  |
| Dewatering             | 4 wells, telemetry, frac tank, 4 weeks                                  | \$5,500   |
| BIM 4D + Peer Review   | LOD 400 + Tekla rebar + P6 4D + Walter P Moore                          | \$2.5k    |
| Mob + Tech             | Soilmec rig, drone, GPR, QR                                             | \$5,400   |
| SUBTOTAL               | Base                                                                    | \$122,400 |
| Less Efficiency Credit | Owner provides 480V power for rig (vs generator)                        | -\$4,000  |
| Less Early Award       | Awarded within 7 days                                                   | -\$6,000  |
| TOTAL Base             | After credits                                                           | \$112,400 |
| Option                 | Static load test with Osterberg cell                                    | \$12,000  |
| Option                 | Cathodic protection anodes for piers                                    | \$3,800   |

**Payment:** Net 15, 20% mobilization, 50% pier completion, 30% podium stressing. Retainage 10% until substantial, 0% after. Bond at 1.8% extra. Price valid 45 days then ENR CCI escalation.

**Schedule Advantage:** 21 days vs 28-32 competitors – saves tower crane rental \$15k/day if critical path (owner benefit ~\$105k). Justifies \$14k premium over Atlas.

**Financing:** Meridian offers material financing via Wells Fargo for institutional clients.